

UpRight
LX31

Scissor lifts

large deck & supra-deck

working height
up to 37ft. (11.45m)

Driveable at full elevation

Proportional controls for
quick and easy maneuvering

Superior gradeability for
rough job site conditions

Low retracted height assures
easy on/off access and
simplifies material loading

Exceptionally tight
turning radius

Large platform area for
tools and materials

Oscillating front axle on 4WD

Five year
structural warranty



Photograph shown U.S. model


specifications	LX31SD	LX31DD	LX31Supa-Deck
working height (A)	37ft. (11.45m)*	37ft. (11.45m)*	37ft. (11.45m)*
platform height (max.) (B)	31ft. (9.45m.)	31ft. (9.45m.)	31ft. (9.45m.)
platform capacity (max.)			
- one deck extended	2000lbs. (907kg.)	-	-
- two decks extended	-	1750lbs. (794kg.)	1750lbs. (794kg.)
- on deck extension	500lbs. (227kg.)	500lbs. (227kg.)	500lbs. (227kg.)
platform size			
- with one deck extended	68ins. x 190ins. (1.73m. x 4.8m.)	-	-
- with two decks extended	-	68ins. x 224ins. (1.73m. x 7.06m.)	68ins. x 278ins. (1.73m. x 7.06m.)
- with decks retracted	68ins. x 156ins. (1.73m. x 3.96m.)	68ins. x 156ins. (1.73m. x 3.96m.)	68ins. x 156ins. (1.73m. x 3.96m.)
width (C)	90 ins. (2.29 m.)	90 ins. (2.29 m.)	90 ins. (2.29 m.)
length (D)			
- with one deck extended	16ft. (4.8m.)	-	-
- with two decks extended	-	18ft. 8ins. (5.6m.)	23ft. (7.01m.)
- with decks retracted	13ft. 3ins. (4m.)	13ft. 3ins. (4m.)	13ft. 3ins. (4m.)
height stowed (E)	8ft. 3ins. (2.5m.)	8ft. 3ins. (2.5m.)	8ft. 3ins. (2.5m.)
- with guardrails lowered	5ft. 3ins. (1.6m.)	5ft. 3ins. (1.6m.)	5ft. 3ins. (1.6m.)
weight			
- 2WD electric	10,110 lbs. (4,586kg.)	10,840 lbs. (4,917 kg.)	10,734lbs. (4,869kg)
- 2WD bi-energy	9,440 lbs. (4,282kg.)	10,170 lbs. (4,613 kg.)	11,085lbs. (5,028kg)
- 4WD diesel	9,780 lbs. (4,436 kg)	10,510 lbs. (4,767 kg.)	10,403lbs. (4,719kg)
inside turning radius	48ins. (1.22m.)	48ins. (1.22m.)	48ins. (1.22m.)
gradeability			
- 2WD electric	30% (17°)	30% (17°)	30% (17°)
- 2WD bi-energy	30% (17°)	30% (17°)	30% (17°)
- 4WD diesel	35% (19°)	35% (19°)	35% (19°)
lift speed			
- 2WD electric	50 secs. / 52 secs.	50 secs. / 52 secs.	50 secs. / 52 secs.
- 2WD bi-energy	50 secs. / 52 secs.	50 secs. / 52 secs.	50 secs. / 52 secs.
- 4WD diesel	40 secs. / 52 secs.	40 secs. / 52 secs.	40 secs. / 52 secs.
drive speed (max.)		2.9mph. - 3.1mph. (4.9km/h. - 0.5km/h.)	
- with platform raised		0.3mph. - 0.5mph. (0.48km/h. - 0.8km/h.)	
tires			
- 2WD electric	9.5 x 16.5 NHS	9.5 x 16.5 NHS	9.5 x 16.5 NHS
- 2WD bi-energy	9.5 x 16.5 NHS	9.5 x 16.5 NHS	9.5 x 16.5 NHS
- 4WD diesel	10 x 16.5 NHS	10 x 16.5 NHS	10 x 16.5 NHS
toeboards	6ins. (152mm.)	6ins. (152mm.)	6ins. (152mm.)
power source		Dual electric 48 VDC	
- 2WD electric		Dual electric 48 VDC / Kubota ZB 200C diesel	
- 2WD bi-energy		Kubota D905E	
- 4WD diesel			

*Working height in the U.S. is 6 ft. above platform height. Metric working height is 2m above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.


standard features

Proportional controls	Removable controller
Easy access service modules	Multiple disc, dual wheel parking brake
Oscillating front axle 4WD	1 year parts/service
Descent alarm	5 year structural warranty
Tilt alarm	
Power to platform	
Air line to platform	
Air-filled tires w/sealant (not LX50 / supa-deck)	
Weatherproof electrical enclosure	
Quick folding guardrail system	

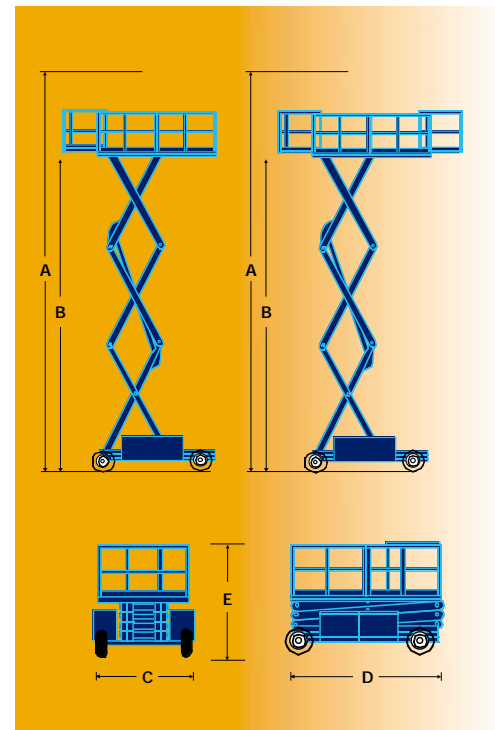

options

- Dual roll-out deck extension
- Outriggers
- Flashing amber beacon
- All motion alarm
- Horn
- Poly-filled tires
- Diesel exhaust scrubber
- Special paint colors
- Environmental green oil



Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

UpRight

UpRight

www.upright.com
e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe/Africa/M. East
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

France
Tel + 33 130 37 05 44
Fax + 33 130 37 63 68

Germany
Tel + 49 2103 98950
Fax + 49 2103 989549

Singapore
Tel + 65 6324 1322
Fax + 65 6225 5157

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840