

UpRight
LX41

Scissor lifts

large deck & supra-deck

Heavy-duty elevating linkage provides sturdy platform at working heights up to 47ft. (14.34m)

Driveable at full elevation

Proportional controls for quick and easy maneuvering

Superior gradeability for rough job site conditions

Low retracted height assures easy on/off access and simplifies material loading

Exceptionally tight turning radius

Large platform area for tools and materials

Oscillating front axle on 4WD

Five year structural warranty




Photograph shown U.S. model

specifications	LX41SD	LX41DD	LX41Supa-deck
working height (A)	47ft. (14.34m)*	47ft. (14.34m)*	47ft. (14.34m)*
platform height (max.) (B)	41ft. (12.34m.)	41ft. (12.34m.)	41ft. (12.34m.)
platform capacity (max.)			
- one deck extended	1500lbs. (680kg.)	-	-
- two decks extended	-	1250lbs. (567kg.)	1250lbs. (567kg.)
- on deck extension	500lbs. (227kg.)	500lbs. (227kg.)	500lbs. (227kg.)
platform size			
- with one deck extended	68ins. x 190ins. (1.73m. x 4.8m.)	-	-
- with two decks extended	-	68ins. x 224ins. (1.73m. x 7.06m.)	68ins. x 278ins. (1.73m. x 7.06m.)
- with decks retracted	68ins. x 156ins. (1.73m. x 3.96m.)	68ins. x 156ins. (1.73m. x 3.96m.)	68ins. x 156ins. (1.73m. x 3.96m.)
width (E)	90ins. (2.29m.)	90ins. (2.29m.)	90ins. (2.29m.)
length (D)			
- with one deck extended	16ft. (4.8m.)	-	-
- with two decks extended	-	18ft.8ins. (5.6m.)	23ft. (7.01m.)
- with decks retracted	13ft.3ins. (4m.)	13ft.3ins. (4m.)	13ft.3ins. (4m.)
height stowed (C)	9ft. (2.7m.)	9ft. (2.7m.)	9ft. (2.7m.)
- with guardrails lowered	6ft.1in. (1.8m.)	6ft.1in. (1.8m.)	6ft.1in. (1.8m.)
weight			
- 2WD electric	11,680lbs. (5,298kg.)	12,410lbs. (5,629kg.)	12,304lbs. (5,581kg.)
- 2WD bi-energy	11,010lbs. (4,994kg.)	11,740 lbs. (5,325kg.)	12,654lbs. (5,740kg.)
- 4WD diesel	10,860 lbs. (4,926 kg.)	12,080 lbs. 5,479kg.)	11,973lbs. (5,431kg.)
inside turning radius	48ins. (1.22m.)	48ins. (1.22m.)	48ins. (1.22m.)
gradeability			
- 2WD electric	30% (17°)	30% (17°)	30% (17°)
- 2WD bi-energy	30% (17°)	30% (17°)	30% (17°)
- 4WD diesel	35% (19°)	35% (19°)	35% (19°)
lift speed			
- 2WD electric	57 secs. / 60 secs.	57 secs. / 60 secs.	57 secs. / 60 secs.
- 2WD bi-energy	57 secs. / 60 secs.	57 secs. / 60 secs.	57 secs. / 60 secs.
- 4WD diesel	45 secs. / 60 secs.	45 secs. / 60 secs.	45 secs. / 60 secs.
drive speed (max.)		2.9mph. - 3.1mph. (4.9km/h. - 5.0km/h.)	
- with platform raised		0.3mph. - 0.5 mph. (0.48km/h. - 0.8km/h.)	
tires			
- 2WD electric	9.5 x 16.5 NHS	9.5 x 16.5 NHS	9.5 x 16.5 NHS
- 2WD bi-energy	9.5 x 16.5 NHS	9.5 x 16.5 NHS	9.5 x 16.5 NHS
- 4WD diesel	10 x 16.5 NHS	10 x 16.5 NHS	10 x 16.5 NHS
toeboards	6ins. (152mm.)	6ins. (152mm.)	6ins. (152mm.)
power source		Dual electric 48 VDC	
- 2WD electric		Dual electric 48 VDC / Kubota ZB 200C diesel	
- 2WD bi-energy		Kubota D905E	
- 4WD diesel			

*Working height in the U.S. is 6 ft. above platform height. Metric working height is 2m above platform height.
 Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only.
 Refer to appropriate UpRight Operators manual for detailed instructions for the proper use and maintenance of this equipment.

standard features

- | | |
|-----------------------------|---|
| Proportional controls | Air-filled tires w/sealant |
| Easy access service modules | Weatherproof electrical enclosure |
| Oscillating front axle 4WD | Quick folding guardrail system |
| Descent alarm | Multiple disc, dual wheel parking brake |
| Tilt alarm | Removable controller |
| Power to platform | 1 year parts/service |
| Air line to platform | 5 year structural warranty |

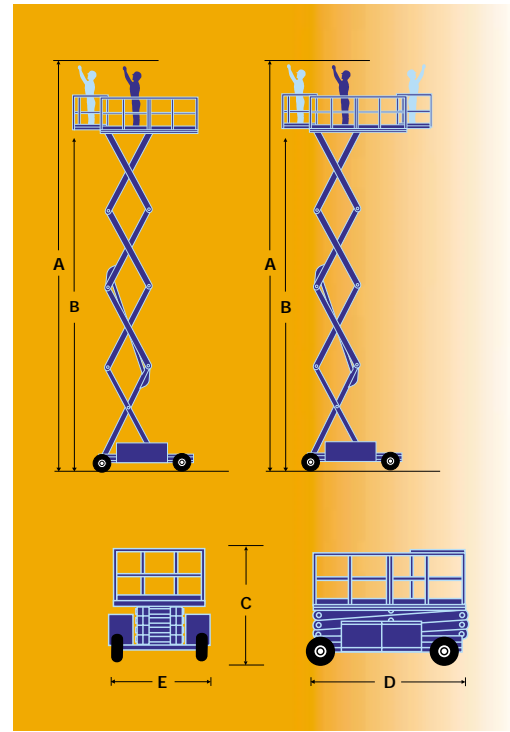

options

- Dual roll-out deck extension
- Outriggers
- Flashing amber beacon
- All motion alarm
- Horn
- Poly-filled tires
- Diesel exhaust scrubber
- Special paint colors
- Environmental green oil

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight

UpRight

www.upright.com
 e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
 Tel + 1 (559) 662 3900
 Fax + 1 (559) 673 6184

Europe
 Tel + 353 1 620 9300
 Fax + 353 1 620 9301

SALES

USA / The Americas
 Tel + 1 (559) 662 3900
 Fax + 1 (559) 673 6184

Europe/Africa/M. East
 Tel + 44 (0) 1952 685 200
 Fax + 44 (0) 1952 685 255

France
 Tel + 33 130 37 05 44
 Fax + 33 130 37 63 68

Germany
 Tel + 49 2103 98950
 Fax + 49 2103 989549

Singapore
 Tel + 65 6324 1322
 Fax + 65 6225 5157

Australia
 Tel + 61 2 9748 6200
 Fax + 61 2 9748 6255

P. R. China
 Tel + 86 21 63390190
 Fax + 86 21 63390191

Japan
 Tel + 81 3 5765 6841
 Fax + 81 3 5765 6840