

UpRight
MX15/19

Scissor lifts

micro electric



Photograph shown U.S. model

Working heights up to
21ft. (6.5m.) or 25ft. (7.8m.)

Extremely tight turning
radius gives excellent
manoeuvrability

Compact dimensions
30in. (0.76m.) wide
and 68.75in. (1.75m.) length

Fully proportional,
one-hand controls

Roll-out deck extension
provides larger platform area
and over-reach

Non-marking tires
protect floor finishes


Hydraulic pothole
protection system

5 year structural warranty



specifications	MX15	MX19
working height A	21ft. (6.5m.)*	25ft. (7.8m.)*
platform height B	15ft. (4.5m.)	19ft. (5.8m.)
maximum drive height	15ft. (4.5m.)	19ft. (5.8m.)
platform capacity (max.)*	550lbs. (250kg.)	500lbs. (227kg.)
platform size (inside) (deck extended)	28.5 in. x 100 in. (0.72m. x 2.54m.)	28.5in. x 100in. (0.72m. x 2.54m.)
weight	2,300lbs. (1,043kg.)	3,100lbs. (1,406kg.)
stowed height E	74.5in. (1.8m.)	79.25in. (2.01m.)
stowed length D - steps removed	68.75in. (1.75m.) 63in. (1.6m.)	68.75in. (1.75m.) 63in. (1.6m.)
width C	30in. (0.75m.)	30in. (0.75m.)
drive speed - max. with platform raised	2.3mph. (3.7km/h.) 0.62mph. (1km/h.)	2.3mph. (3.7km/h.) 0.62mph. (1km/h.)
gradeability	25% (14 degrees)	25% (14 degrees)
inside turning radius	1in. (25.4mm.)	1in. (25.4mm.)
ground clearance	3.75in. (95mm.)	3.75in. (95mm.)
lift speed - raise/lower	16/18 seconds	18/18 seconds
toeboards	6in. (152mm.)	6in. (152mm.)
control system	smooth, one-hand proportional controls	
drive system	dual front wheel hydraulic motors	
tires	12in. (0.31cm.) diameter, solid rubber, non-marking	
power source	24V hp DC electric motor 4 x 6V 220 Ah batteries	
battery charger	25 amp 90V - 240V automatic with ammeter	
parking brake release	2 wheel, spring-applied hydraulic and manual	

* Working height in the U.S. is 6ft. above platform height. Metric working height is 2m. above platform height. Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operator's manual for detailed instructions on the proper use and maintenance of this equipment.

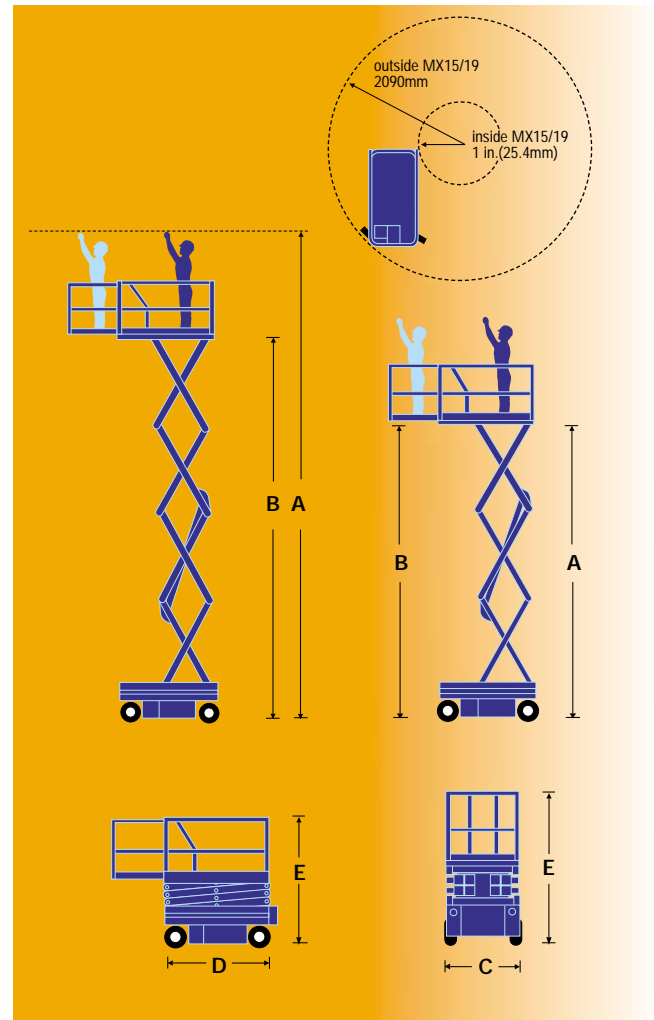

standard features

- Roll-out deck extension with foot pedal release
- Non-marking tires
- Swing-out service modules
- Tilt alarm, descent alarm
- Selectable motion/alarm
- D-ring transport tie downs
- Proportional controls
- Lift-up rear guardrail to ease loading
- Ground view grates in deck extension
- Power to platform
- Hour meter
- 1 year parts/service
- 5 year structural warranty

options

- Horn, push button on controller
- Hour meter/low voltage indicator
- Removable controller
- Special paint colors
- Environmental green oil

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight



Compact dimensions and tight turning radius provides excellent manoeuvrability

UpRight

www.upright.com
e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel + 1 (559) 662 3900
Fax + 1 (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel + 1 (559) 662 3900
Fax + 1 (559) 673 6184

Europe/Africa/M. East
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

France
Tel + 33 130 37 05 44
Fax + 33 130 37 63 68

Germany
Tel + 49 2103 98950
Fax + 49 2103 989549

Singapore
Tel + 65 6324 1322
Fax + 65 6225 5157

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840