

UpRight
X20

Scissor lifts

standard electric

Working height up to
26ft. (8.10m)

Rigid scissor-set provides
solid, stable platform

Highly maneuverable -
very tight turning radius

Low stowed height and
lifting rear guardrail for
easy loading

Swing out component
modules

Fully proportional,
one hand controls

Steel deck with
slip-resistant surface

Non-marking tires


Five year
structural warranty



Photograph shown U.S. model

specifications	X20N	X20W
working height (A)	26ft. (8.10m)*	26ft. (8.10m)*
platform height (B)	20ft. (6.10m.)	20ft. (6.10m.)
drive height (max)	20ft. (6.10m.)	20ft. (6.10m.)
platform capacity (max)	750lbs. (340kg.)	1,000lbs. (454kg.)
platform size - inside with deck extended	28ins. x 126ins. (0.71m. x 3.2m.)	46.25ins. 126ins. (1.17m. x 3.2m.)
width (C)	32.5ins. (0.82m.)	48ins. (1.22m.)
length (D)	92.5ins. (2.35m.)	92.5ins. (2.35m.)
stowed height (E)	78.5ins. (1.99m.)	78.5ins. (1.99m.)
weight	3,828lbs. (1,736kg.)	4,273lbs. (1,938kg.)
drive speed (max) -with platform raised	2.0mph (3.2km/h.) 0.62mph. (1.0km/h.)	2.0mph (3.2km/h.) 0.62mph. (1.0km/h.)
gradeability	23% (13°)	23% (13°)
inside turning radius	8ins. (203mm.)	8ins. (203mm.)
ground clearance	4.5ins. (114mm.)	4.5ins. (114mm.)
lift speed - raised / lowered	30 secs / 30 secs	40 secs / 30 secs
drive system	dual front wheel hydraulic motors	
power source	4 x 6V 220 Ah batteries	
control system	one-hand proportional control	
tires	15ins. dia. solid non-marking	
toeboards	6ins. (152mm.)	6ins. (152mm.)
battery charger	25 A, 110/220V AC	25 A, 110/220V AC
parking brake	dual, spring-applied, hydraulic release	

*Working height in the U.S. is 6 ft. above platform height. Metric working height is 2m above platform height. Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

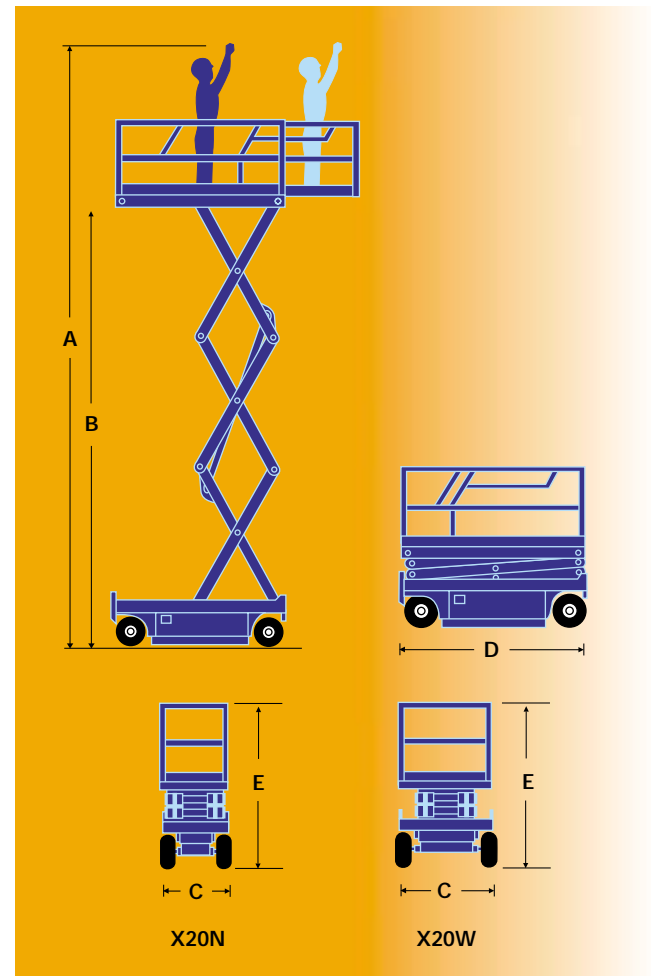

standard features

- Roll-out deck extension
- One-hand proportional control
- Lift-up rear handrail to ease loading
- Tilt alarm, descent alarm
- Non-marking tires
- Swing-out service modules
- Crane and forklift points
- Power to platform
- Proportional controls
- Selectable motion alarm
- 1 year parts/service
- 5 year structural warranty

options

- Horn
- Air line to platform
- Flashing beacon
- Removable controller
- Hour meter/low voltage indicator (standard on CE models)
- Special paint colors
- Environmental green oil

UpRight

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel + 1 (559) 662 3900
Fax + 1 (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel + 1 (559) 662 3900
Fax + 1 (559) 673 6184

Europe/Africa/M. East
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

France
Tel + 33 130 37 05 44
Fax + 33 130 37 63 68

Germany
Tel + 49 2103 98950
Fax + 49 2103 989549

Singapore
Tel + 65 6324 1322
Fax + 65 6225 5157

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840

www.upright.com

e-mail: marketing@upright.com

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.



This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

UpRight

