

UpRight
X26

scissor lifts

standard electric



Working height up to
32ft. (9.93m)

Maneuvers easily with tight
inside turning radius

Electric motor controller for
smooth precise positioning

Fully proportional,
one hand controls

Controller switches easily
from right to left side

Steel deck with
slip-resistant surface

Non-marking tires


Five year
structural warranty

Photograph shown U.S. model



specifications	X26
working height (A)	32ft. (9.93m.)*
platform height (B)	26ft. (7.93m.)
drive height (max)	26ft. (7.93m.)
platform capacity (max)	1,000lbs. (454kg.)
platform size - inside with deck extended	46.25ins. x 126ins. (1.17m. x 3.2m.)
width (C)	48ins. (1.22m.)
length (D)	92.5ins. (2.35m.)
stowed height (E)	83.5ins. (2.12m.)
- with guardrails lowered	78ins. (1.98m.)
weight	4747lbs. (2,153kg.)
drive speed (max)	2.0mph. (3.2km/h.)
- with platform raised	0.62mph. (1.0km/h.)
gradeability	22% (12°)
inside turning radius	8ins. (203mm.)
ground clearance	3.5ins. (89mm.)
lift speed - raised / lowered	45 secs. / 40 secs.
drive system	dual front wheel hydraulic motors
power source	4 x 6V 220 Ah batteries
control system	one-hand proportional control
tires	15ins. (381mm.) dia. solid non-marking
toeboards	6ins. (152mm.)
battery charger	25 A, 110/220V AC
parking brake	dual, spring-applied, hydraulic release

*Working height in the U.S. is 6 ft. above platform height. Metric working height is 2m above platform height. Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

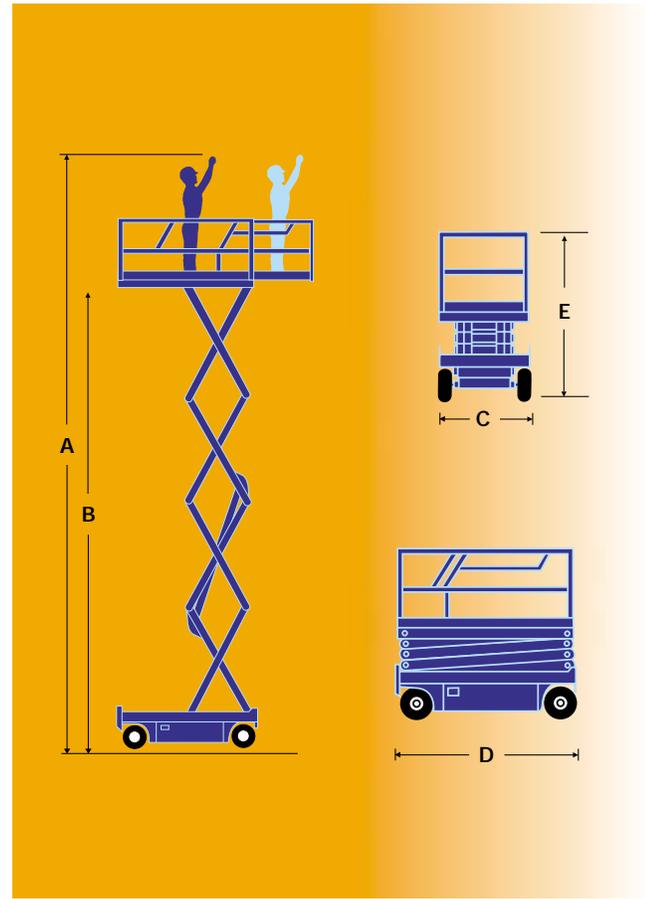

standard features

- Roll-out deck extension
- One-hand proportional control
- Non-marking, solid rubber tires
- Swing-out service modules
- Lift-up rear guardrail to ease material loading
- Tilt alarm, descent alarm
- Selectable all-motion alarm
- Crane and forklift points
- Cushion down scissor descent
- Power to platform
- 1 year parts/service
- 5 year structural warranty

options

- Horn
- Removable controller
- Flashing amber beacon
- Hour meter/low voltage indicator (standard on CE models)
- Air line to platform
- Special paint colors
- Environmental green oil

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight

UpRight

www.upright.com
e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

MANUFACTURING

North America
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe
Tel + 353 1 620 9300
Fax + 353 1 620 9301

SALES

USA / The Americas
Tel +1 (559) 662 3900
Fax +1 (559) 673 6184

Europe/Africa/M. East
Tel + 44 (0) 1952 685 200
Fax + 44 (0) 1952 685 255

France
Tel + 33 130 37 05 44
Fax + 33 130 37 63 68

Germany
Tel + 49 2103 98950
Fax + 49 2103 989549

Singapore
Tel + 65 6324 1322
Fax + 65 6225 5157

Australia
Tel + 61 2 9748 6200
Fax + 61 2 9748 6255

P. R. China
Tel + 86 21 63390190
Fax + 86 21 63390191

Japan
Tel + 81 3 5765 6841
Fax + 81 3 5765 6840

