

# UpRight X31 & X32

# Scissor lifts

standard electric

Working height up to:  
37ft. 6in. (U.S.)  
11.75m (CE.)

Maneuvers easily with tight  
inside turning radius

Electronic motor controller  
for smooth, quiet operation

Precise proportional control  
of drive/lift functions

Steel deck with  
slip-resistant surface

Platform material  
loading system

Non-marking tires  
protect floors

Five year  
structural warranty



Photograph shown CE model

specifications	X31(U.S. model)	X32 (CE model)
working height (A)	36ft. 7ins.*	11.75m.*
platform height (B)	30ft. 7ins.	9.75m.
drive height	30ft. 7ins.	9.75m.
platform capacity	700lbs.	340kg.
platform size - inside with deck extended	46.25ins. x 126ins.	1.22m. x 3.2m.
width (C)	48ins.	1.88m.
stowed height (D)	88.5ins.	2.25m.
-with guardrails lowered	74.35ins.	1.88m.
length (E)	92.5ins.	2.35m.
weight	5,480lbs.	2,486kg.
drive speed (max)	2.0mph.	3.2km/h.
-with platform raised	0.62mph.	1.0km/h.
inside turning radius	8ins.	203mm.
control system	one-hand proportional control	
gradeability	22%	12°
lift speed - raised / lowered	65 secs./40 secs.	
drive system	dual front wheel hydraulic motors	
power source	4 x 6V 220 Ah batteries	
tires	15ins. (381mm) dia. solid non-marking	
ground clearance	3.5ins.	89mm.
toeboards	6ins.	152mm.
battery charger	25 A, 110/220V AC	
parking brake	dual, spring applied, hydraulic release	

\*Working height in the U.S. is 6 ft. above platform height. Metric working height is 2m above platform height.


Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight Operators manual for detailed instructions on the proper use and maintenance of this equipment.

## standard features

- Roll-out deck extension
- One-hand proportional control
- Non-marking tires
- Swing-out service modules
- Tilt alarm, descent alarm
- One-hand, proportional control
- Power to platform
- Selectable, all motion alarm
- Guardrail opens for easy material loading
- Crane and forklift points
- Cushion down system
- Dual front wheel drive
- 1 year parts/service
- 5 year structural warranty

## options

- Horn
- Removable controller
- Air line to platform
- On-board generator
- Flashing beacon
- Hour meter/low voltage indicator (standard on CE models)
- Special paint colors
- Environmental green oil

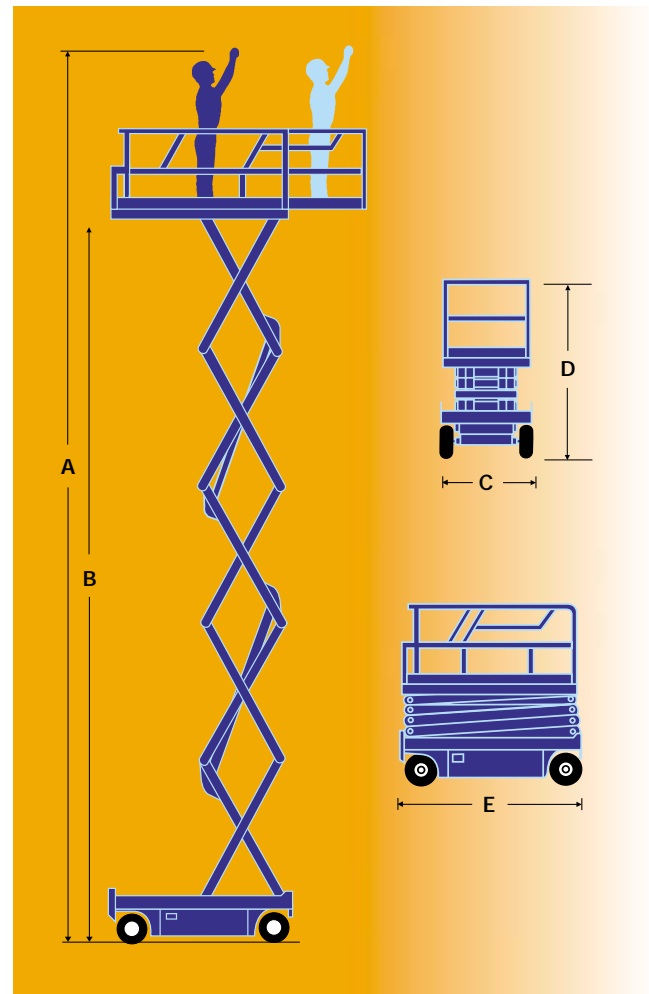

# UpRight

www.upright.com  
e-mail: marketing@upright.com

GLOBAL PROVIDER OF ACCESS SOLUTIONS

### MANUFACTURING

North America  
Tel +1 (559) 662 3900  
Fax +1 (559) 673 6184

Europe  
Tel + 353 1 620 9300  
Fax + 353 1 620 9301

### SALES

USA / The Americas  
Tel +1 (559) 662 3900  
Fax +1 (559) 673 6184

Europe/Africa/M. East  
Tel + 44 (0) 1952 685 200  
Fax + 44 (0) 1952 685 255

France  
Tel + 33 130 37 05 44  
Fax + 33 130 37 63 68

Germany  
Tel + 49 2103 98950  
Fax + 49 2103 989549

Singapore  
Tel + 65 6324 1322  
Fax + 65 6225 5157

Australia  
Tel + 61 2 9748 6200  
Fax + 61 2 9748 6255

P. R. China  
Tel + 86 21 63390190  
Fax + 86 21 63390191

Japan  
Tel + 81 3 5765 6841  
Fax + 81 3 5765 6840

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.



This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by

**UpRight**

